


Zeskantkop (DIN 571)

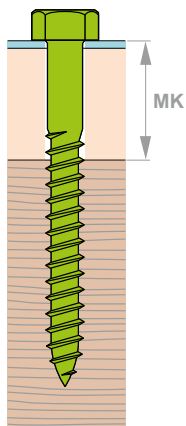

houtdraadbout

roestvrij staal austenitisch
A2 AISI 304corrosieweerstand
= 30 cycli kesterlichSCHROEF T.H. / IN A2
(DIN 571)

Ø	x	L	MK	SW	VE	code
6	x	30		10	200	15710
6	x	40		10	200	15712
6	x	50		10	200	15714
6	x	60		10	100	15716
6	x	70		10	100	15718
6	x	80		10	100	15720
6	x	90		10	100	15722
8	x	50		13	100	15234
8	x	60	10	13	100	15260
8	x	70	20	13	100	15245
8	x	80	30	13	100	15250
8	x	90	40	13	100	15256
8	x	100	50	13	100	15230
8	x	120	70	13	50	15220
8	x	140	90	13	50	15238
8	x	150	100	13	50	15244
8	x	160	110	13	50	15240
8	x	180	130	13	50	15257
8	x	200	150	13	50	15265

- ▶ Ø van de schroefdraad
- ▶ gelakte uitvoering en andere afmetingen op aanvraag
- ▶ **toepassing** (dak): bevestigen op houten gordingen
- ▶ ander beschikbaar materiaal:
- ▶ warm verzinkt
- ▶ verzinkt staal "LBT 3 / WVZ" op pagina 01-34