



Zeskantkop met brede kraag - Ø 15 mm / dikte 1,5 mm

montage in staal dikte < 18 mm - spiraal boorpunt

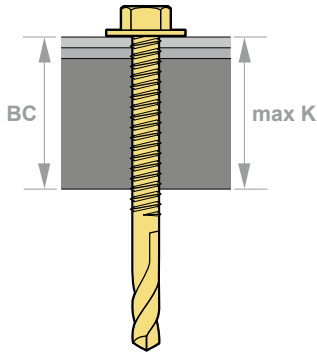

staal geel verzinkt	supracoat 2C	supracoat 3C
corrosieweerstand = 2 cycli Kesternich	corrosieweerstand = 15 cycli Kesternich	corrosieweerstand = 30 cycli Kesternich
GOLDOVIS SPIRAL / GVZ	GOLDOVIS SPIRAL / 2C	GOLDOVIS SPIRAL / 3C

BC	Ø	x	L	ref.	min K	max K	SW	VE	code	VE	code	VE	code
4 - 18	6,3	x	63	18	-	35	10	100	331130	100	331132	100	331133

BC: boorcapaciteit door staal (minimum / maximum)