


Draadstang met niet-gemonteerde moer en ring - recht afgezaagd

in holle materialen




						staal klasse 5.8 verzinkt $\geq 5 \mu\text{m}$		austenitisch RVS A2 - 50	
						DRAADSTANG / VZ VOOR CHIMFORT KEM		DRAADSTANG / IN A2 VOOR CHIMFORT KEM	
d	x	l	t _{fix}	SW	zeef*	VE	code	VE	code
M 6	x	70	8	10	12 x 50	50	344820		
M 8	x	100	11	13	15 x 85	25	344822		
M 8	x	110	21	13	15 x 85			50	344533
M 8	x	160	26	13	15 x 130	25	344824	50	344534
M 10	x	110	20	17	15 x 85	25	344826	50	344960
M 10	x	160	25	17	15 x 130	25	344827	50	344536
M 12	x	115	22	19	15 x 85	25	344829	50	344537
M 12	x	160	22	19	15 x 130	25	344830	50	344966
M 12	x	200	62	19	15 x 130	25	344832		

(*) afmetingen van de zeef aanbevolen

Draadstang - dubbel afgekant met niet-gemonteerde moer en ring

met zeskantaandrijving - in volle materialen

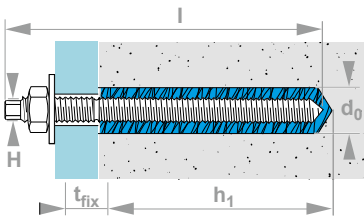

								staal klasse 5.8 verzinkt $\geq 5 \mu\text{m}$		austenitisch roestvrij staal A4 - 70	
								DRAADSTANG DB / VZ VOOR CHIMFORT KEM		DRAADSTANG DB / IN A4 VOOR CHIMFORT KEM	
d	x	l	t _{fix}	d ₀	h ₁	SW	H	VE	code	VE	code
M 8	x	110	14	10	80	13	5	10	340040	10	340060
M 10	x	130	21	12	90	17	6	10	340042	10	340062
M 12	x	160	28	14	110	19	8	10	340044	10	340064
M 16	x	190	38	18	125	24	12	10	340046	10	340066
M 20	x	260	48	25	170	30	14	5	340048	5	340068
M 24	x	300	54	28	210	36	17	5	340050	5	340070
M 30	x	380	60	35	280	46	-	5	340052	5	340072
M 10	x	130	21	12	90	17	6	emmer 200	340075		

- ▶ bestemd voor: beton (volle materialen * met voorafgaande proeven) - toepassing voor zware belasting
- ▶ inslaghulpstuk geleverd in elke doos draadstangen